


LUGE: EM-F345

Fanless Intel® Atom™ 1.6Ghz embedded system with VGA, DVI-D, Dual LAN, USB, COM and CompactFlash or SATA drive support

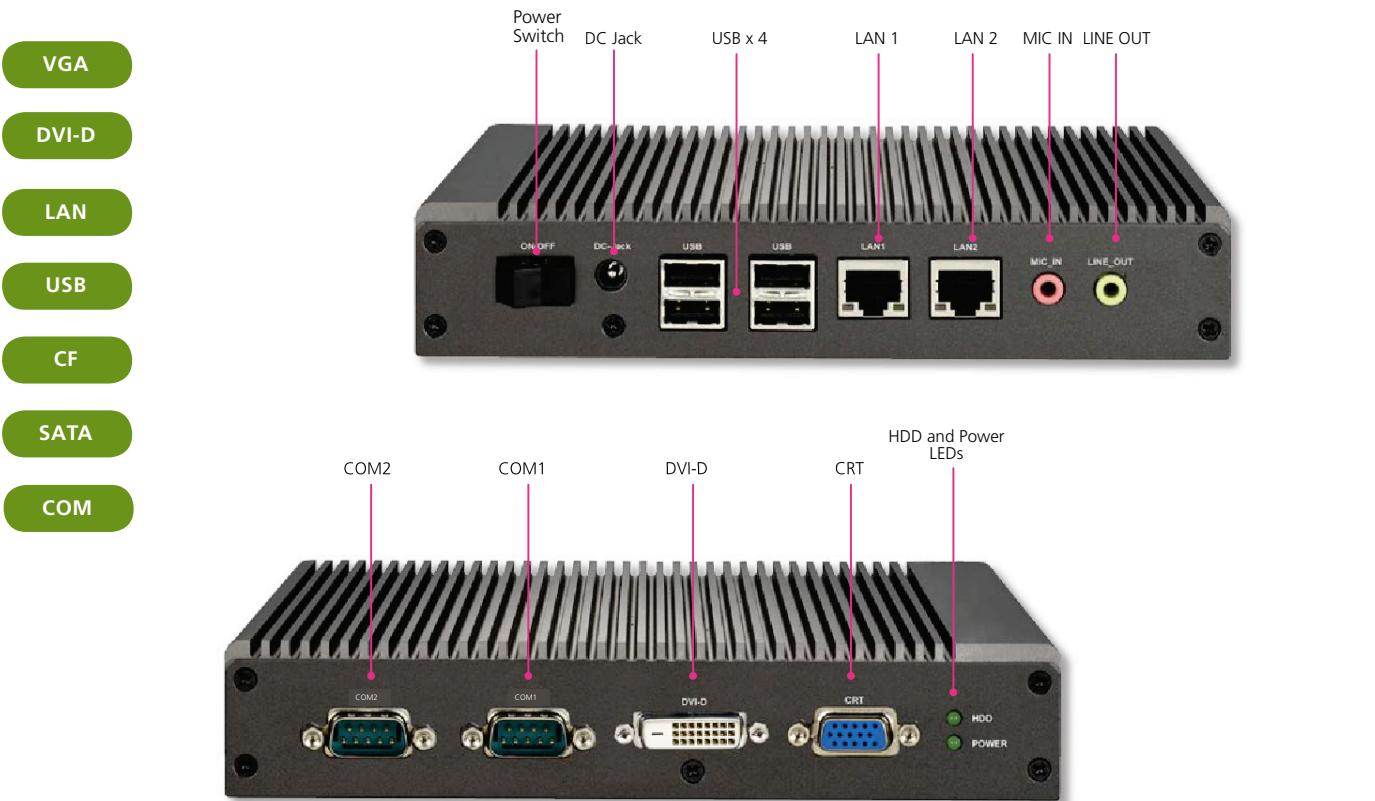

FEATURES

- Intel® Atom™ 1.6 GHz onboard CPU
- Robust fanless enclosure
- Slim 36mm case with heat dispersing fins
- -20°C to 50°C operating temperature
- Supports up to 2GB DDR2 memory
- Dual Display (CRT+DVI-D)
- Dual 10/100/1000 Mbps LAN
- USB x 4, COM x 2
- CompactFlash Type I/II or SATA HDD support
- Wall or VESA mounting brackets optional

FLEXIBLE MOUNTING AND DEPLOYMENT OPTIONS

The EM-F345 is designed for flexible deployment in any scenario. Its robust fanless design makes the EM-F345 an ideal solution for video applications such as digital signs, outdoor advertising and kiosk systems.

The onboard Intel® Atom™ embedded processor provides unsurpassed performance with very low heat generation and minimal cooling requirements, resulting in improved stability and longevity, and providing a higher return on investment.

To provide even more flexibility, our engineers have built the case of tough aluminum with heat dispersing fins to whisk away heat from the processor and allow the system to operate in harsh environments - from -20°C to 50°C. Whether you need a machine for digital signage, ATM, POS, or a factory controller, the EM-F345 is built for the task.





FEATURE	DESCRIPTION	
Platform	Processor	Onboard Intel® Atom™ 1.6 GHz
	Chipset	Intel 945GSE+ICH7M
	BIOS	AMIBIOS with 8Mbit BIOS Flash
System Memory	Technology	DDR2 400/533 SDRAM
	Maximum Capacity	2GB
Storage Interface	Socket	200P SODIMM x1
	CompactFlash I/II	1
	SATA Port	1
Networking	LAN Ports	2
	Speed	10/100/1000 Mbps
Display	Controller	Intel 945GSE built-in Intel Extreme Graphics
Audio	Codec	ALC888 HD Codec
Front I/O	Serial	2 ports (RS-232/422/435)
	VGA	1
	DVI-D	1
Rear IO	Power switch	1
	USB 2.0	4
	LAN	RJ45 x 2
	Mic In / Line Out	1 / 1
Expansion	Optional mini-PCI socket for Mini-PC Wireless Module	
Hardware Monitoring	Controller	Winbond W83627UHG integrated hardware monitor
	Watchdog timer	255 level software programmable watchdog timer
OS Supported	Win XP Embedded, Win XP 32-bit, Win 2000, Linux kernel 2.4.16 or above	
Environmental Parameters	Temperature, ambient operating	-20°~50°C (with industrial components - CF card, memory, adapter)
		0~40°C (with 2.5" HDD)
	Humidity (RH), ambient operating	10~95% relative humidity, non-condensing
	Storage Temperature	-20°~70°C (-4°~158°F)
Mounting	Shock	CFD: 100g peak acceleration (6 msec duration)
	Optional Desktop/wall mounting kit	
	Optional VESA mounting kit	
Physical Dimensions	Dimensions	145D x 190W x 36H mm
	Weight	1.07Kg
Power	Input	DC +12V, 60W

ORDERING INFORMATION

EM-F345

Fanless Embedded System with Intel Atom 1.6 GHz CPU onboard, CF Socket, 2.5" SATA HDD Support

DIMENSIONS

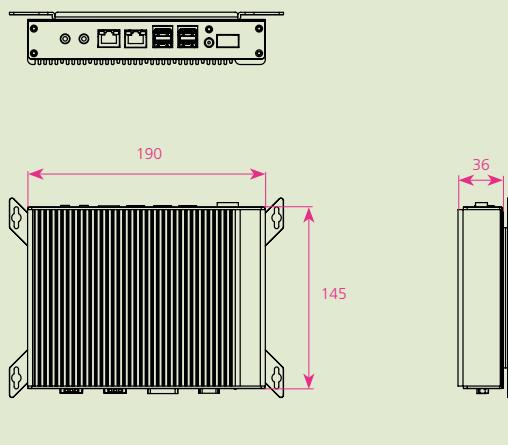

Contact information

LEAD Deutschland GmbH
www.lead.de