

iSignager-300 Standalone Player SD (1366x768) Output



Free bundle with "iSignager AdExpress for Frame" Software

iSignager 300 Series is the RISC-based digital signage solution. iSignager-300A player allows auto scale content display up to 1366 x 768 on the external device. With the bundled iSignager AdExpress software, your can easily produce 1 image (photo or video) and 1 banner layout. It's ideal and easy solution for digital signage entry user.



Features:

- ▶ Fanless and compact size design box
- ▶ Allow auto-scale output content from 720 x 480 up to 1366 x 768
- ▶ Fix template with one picture/video zone and one crawl or scrawling banner
- ▶ Remote update content or management via LAN or Wireless LAN
- ▶ SD Memory Card or 2.5" IDE HDD storage device
- ▶ Free bundle iSignager AdExpress for Frame software

Output Port & Supported Resolutions


Output Port	Output Mode	Resolution
VGA	VGA	Output resolution support only 720 x 480 Support auto-scale up to 1366 x 768 on the external device

Wall-Mount Solution

iSignager-300 is compliant with VESA 75 and 100 mounting standard. It is easy to mount on wall using the VESA 75 or 100 mount kit.



I/O Interface

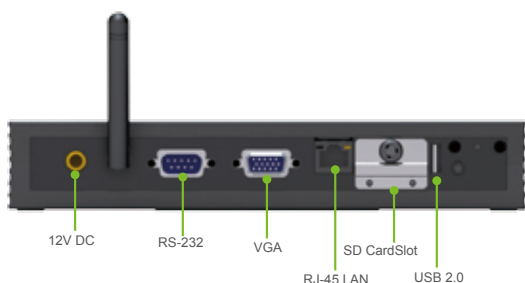

1
Automation

2
Point of Service

3
Digital Signage

4
RISC-based Solutions

5
Medical Solutions

Specifications

iSignager-300 Series

Model		iSIGNAGER-300-R10	iSIGNAGER-300WL-R10
Video Input	Composite		N/A
	DVI		N/A
Video Output	Analog VGA	D-sub 1-pin, up to 720 x 480	
	S-Video	N/A	
	Composite	N/A	
	Audio Input	N/A	
Audio Output	N/A		
LAN	1 x 10/100mBase-T		
Wireless	N/A	802.11b/g wireless	
USB	1 x USB		
RS-232	1 x RS-232		
HDD Drive Bay	N/A		
SSD Drive Bay	1 x SD Memory Card Spec. 2.0 Slot		
Construction Material	ABS+ PC Plastic		
Dimensions	TBD		
Mounting	VESA 75/ 100		
Power Input	12VDC power adapter, 90VAC~240VAC input @5~60Hz, 36W		
Power Consumption	TBD		
Operation Temperature	0°C~50°C		
Net Weight	TBD		
EMC/Safety	CE, FCC, UL		

iSignager-500A Series

Model		iSignager-500A-R10	iSignager-500AWL-R10
Video Input	Composite	RCA x 1	
	DVI	VESA DVI-I connector x 1, up to 1920 x 1080 p @ 60Hz with the H/W scaler	
Video Output	Analog VGA	D-sub 1-pin, up to 1920 x 1200	
	S-Video	Mini-DIN 4 pin connector x 1	
	Composite	RCA x 1	
	Audio Input	Unbalanced stereo RCA jack x 2	
Audio Output	Unbalanced stereo RCA jack x 2		
LAN	RJ-45 x 1		
Wireless	N/A	802.11b/g wireless (Internal Antenna)	
USB	USB A-type Connector x 2		
RS-232	2 x RS-232		
HDD Drive Bay	2.5" IDE HDD bay		
SSD Drive Bay	1 x CF Type II slot		
Construction Material	ABS+ PC Plastic (front panel) Heavy duty steel		
Dimensions	187.2 x 133.7 x 46 mm		
Mounting	VESA 75 & 100		
Power Input	12VDC power adapter, 90VAC~240VAC input @5~60Hz, 45W		
Power Consumption	8W		
Operation Temperature	0°C~50°C		
Net Weight	1.2 KGS		
EMC/Safety	CE, FCC, UL		

iSignager-510H Series

Model		iSignager-510H-R10	iSignager-510HWL-R10
Video Input	Composite	RCA x 1	
	HDMI	VESA HDMI connector x 1, up to 1920 x 1080 p @ 60Hz with the H/W scaler	
Video Output	Analog VGA	D-sub 1-pin, up to 1920 x 1200	
	S-Video	Mini-DIN 4 pin connector x 1	
	Composite	RCA x 1	
	Audio Input	Unbalanced stereo RCA jack x 2	
Audio Output	Unbalanced stereo RCA jack x 2		
LAN	RJ-45 x 1		
Wireless	N/A	802.11b/g wireless (External Antenna)	
USB	USB A-type Connector x 2		
RS-232	1 x RS-232		
HDD Drive Bay	2.5" IDE HDD bay		
SSD Drive Bay	1 x CF Type II slot		
Construction Material	ABS+ PC Plastic (front panel) Heavy duty steel		
Dimensions	187.2 x 133.7 x 46 mm		
Mounting	VESA 75 & 100		
Power Input	12VDC power adapter, 90VAC~240VAC input @5~60Hz, 45W		
Power Consumption	8W		
Operation Temperature	0°C~50°C		
Net Weight	1.2 KGS		
EMC/Safety	CE, FCC, UL		

Ordering Information (RISC-based)

	Model No.	Descriptions	Free bundle Software	
iSignager 300 Player	ISIGNAGER-300-R10	Network digital signage player, max. 1366 x 768 output content resolution, 10/100M LAN, 2x USB, VGA output, 1GB SD Card, Silver, RoHS	iSignager AdExpress for Frame	
	ISIGNAGER-300WL-R10	Network digital signage player, max. 1366 x 768 content resolution, built-in 802.11b/g wireless and 10/100M LAN, 2x USB, VGA output, 1GB SD Card, Silver, RoHS	iSignager AdExpress for Frame	
iSignager 500A Player	ISIGNAGER-500A-R10	Network digital signage player, 10/100M LAN, 2x USB, VGA/S-video/DVI/component output, Silver, RoHS	iSignager AdDesign	
	ISIGNAGER-500AWL-R10	Network digital signage player, 802.11b/g wireless, 10/100M LAN, 2x USB, VGA/S-video/DVI/component output, Silver, RoHS	iSignager AdDesign	
iSignager 510H Player	ISIGNAGER-510H-R10	Network digital signage player, 10/100M LAN, 2x USB, VGA/S-video/HDMI/component output, 1GB CF Card, Silver, RoHS	iSignager AdDesign	
	ISIGNAGER-510HWL-R10	Network digital signage player, 802.11b/g wireless, 10/100M LAN, 2x USB, VGA/S-video/HDMI/component output, 1GB CF Card, Silver, RoHS	iSignager AdDesign	
iSignager Frame Series	ISIGNAGER-FRAME-W07-R10	7" TFT LCD all-in-one Network Digital Signage Display, 300 cd/m2 brightness, built-in 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB SD Card, 36W power adaptor, black, RoHS	iSignager AdExpress for Frame	
	ISIGNAGER-FRAME-08-R10	8" TFT LCD all-in-one Network Digital Signage Display, 300 cd/m2 brightness, built-in 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB SD Card, 36W power adaptor, black, RoHS	iSignager AdExpress for Frame	
	ISIGNAGER-FRAME-W10-R10	10.2" TFT LCD all-in-one Network Digital Signage Display, 400 cd/m2 brightness, built-in 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB SD Card, 36W power adaptor, black, RoHS	iSignager AdExpress for Frame	
	ISIGNAGER-FRAME-W15-R10	15.6" TFT LCD all-in-one Network Digital Signage Display, 250 cd/m2 brightness, built-in 10/100M LAN, 2 x 2W speaker, with OSD remote control, 1GB SD Card, 60W power adaptor, black, RoHS	iSignager AdExpress for Frame	
iSignager LCD	10.4"	ISIGNAGER-LCD-10-R10	10.4" TFT LCD all-in-one Network Digital Signage Display, Dual Display supported, 400cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
		15"	ISIGNAGER-LCD-15-R10	15" TFT LCD all-in-one Network Digital Signage Display, Dual Display supported, 350cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS
	ISIGNAGER-LCD-15ES-R10		15" TFT LCD all-in-one Network Digital Signage Display, Single Display, 250cd/m ² brightness, built-in 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
	ISIGNAGER-LCD-15ESWL-R10		15" TFT LCD all-in-one Network Digital Signage Display, Single Display, 250cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
	ISIGNAGER-LCD-15S-R10		15" TFT LCD all-in-one Network Digital Signage Display, Single Display, 350cd/m ² brightness, built-in 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
	ISIGNAGER-LCD-15SWL-R10		15" TFT LCD all-in-one Network Digital Signage Display, Single Display, 350cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 1.5W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
	17"		ISIGNAGER-LCD-17-R10	17" TFT LCD all-in-one Network Digital Signage Display, Dual Display supported, 350cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 2W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS
		ISIGNAGER-LCD-17S-R10	17" TFT LCD all-in-one Network Digital Signage Display, Single Display, 350cd/m ² brightness, built-in 10/100M LAN, 2 x 2W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
		ISIGNAGER-LCD-17SWL-R10	17" TFT LCD all-in-one Network Digital Signage Display, Single Display, 350cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 2W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
	19"	ISIGNAGER-LCD-19-R10	19" TFT LCD all-in-one Network Digital Signage Display, Dual Display supported, 350cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 3W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
		ISIGNAGER-LCD-19S-R10	19" TFT LCD all-in-one Network Digital Signage Display, Single Display, 350cd/m ² brightness, built-in 10/100M LAN, 2 x 3W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign
		ISIGNAGER-LCD-19SWL-R10	19" TFT LCD all-in-one Network Digital Signage Display, Single Display, 350cd/m ² brightness, built-in 802.11b/g wireless, 10/100M LAN, 2 x 3W speaker, with OSD remote control, 1GB CF card, 60W power adaptor, black, RoHS	iSignager AdDesign

- 1
Automation
- 2
Point of Service
- 3
Digital Signage
- 4
RISC-based Solutions
- 5
Medical Solutions