

UNO-4673A UNO-4683

Intel® Atom™ D510 / Core™ i7 Substation Computers with 6 x LAN, 2 x COM and 3 x Expansion Slots

NEW



Features

- IEC 61850-3 and IEEE 1613 compliant for substation automation applications
- Onboard Intel Atom 1.66 GHz / Core i7 2.0 GHz processor
- 2 x RS-232/422/485 isolated serial ports with automatic flow control and 128KB FIFO
- 2 x 10/100/1000 Base-T (supports teaming function) and 4 x 10/100 Base-T
- Supports 1 x internal CF card and 1 x 2.5" SATA HDD
- 6 x USB 2.0 (1 x internal) and 3 x Domain I/O expansions
- Rear wiring, rich system & I/O LED status indicators
- Windows CE6.0(UNO-4673 only), Windows XP Embedded SP2, Win7, WES7, and Linux
- Fanless design with no internal cabling
- Isolation power design with wide AC / DC input range
- Isolation between chassis and power ground
- One internal USB for dongle and flash drive

Introduction

UNO-4673A and UNO-4683 are compliant with the hardware requirements of IEC 61850-3, which defines the international standards of network and system communications in power substations. Featuring fanless designs with built-in isolated PSU and 3 expansion slots for I/O plug-in cards, UNO-4673A and UNO-4683 are suitable for harsh environment applications. The rear I/O connection and LEDs on front panel for all ports and modes highly simplify monitoring for operation and maintenance.

Specifications

General

- **Certifications** IEC 61850-3, IEEE 1613, CE, FCC Class A, UL, CCC
- **Dimensions (W x D x H)** 2U (440 x 280 x 88) mm (17.3" x 11" x 3.4") fits into standard 19 inch rack
- **Enclosure** SECC+Aluminum
- **Mounting** 2U Rackmount
- **Power Consumption** 24W/45W (Typical)
- **Power Requirements** AC : 100 ~ 240 V_{AC} (47 ~ 63 Hz)
DC : 106 ~ 250 V_{DC}
With isolation protection, AT
- **Weight** 6.0 kg
- **OS Support** Windows CE6.0(UNO-4673 only), Windows XP Embedded SP2, Win7, WES7, and Linux
- **System Design** Fanless with no internal cabling
- **Remote Management** Built-in Advantech DiagAnywhere agent on Windows CE/XPe

System Hardware

- **CPU** Intel Dual Core Atom D510 1.66 GHz / Core i7 2.0 GHz
- **Memory** 2G DDR2 SDRAM/4G DDR3 SDRAM built-in
- **Indicators** LEDs for Power, IDE, Alarm for battery backup SRAM, Diagnosis (programmable), LAN (Active, Status) and Serial (Tx, Rx)
- **Keyboard/Mouse** 2 x PS/2 connector for Keyboard & Mouse
- **Storage** CF 1 x internal type I/II CompactFlash® slot
HDD Built-in one 2.5" SATA HDD bracket*
*RAID capable with 2nd HDD kit
- **Display** 4683A DB15 VGA connector, 1600x1200 @ 85 Hz
4683 series 1x DVI-I, 1920x1080@60Hz
- **Watchdog Timer** Programmable 7-tier event handler, from 1 to 255 seconds for each tier
- **Battery Backup SRAM** 1 MB
- **Relay:**
Relay output: Form C
Contact: 5A@250V_{AC}/5A@30V_{DC}

I/O Interface

- **Serial Ports** 2 x DB-9
Automatic RS-485 data flow control
4000 V_{DC} EFT protection & 2000 V_{DC} isolation
- **Serial Port Speed** RS-232: 50 ~ 115.2 kbps
RS-422/485: 50 ~ 921.6 kbps (Max.)
- **LAN** 2 x 10/100/1000 Base-T RJ-45 ports, teaming function supported
4 x 10/100Base-T RJ-45 ports
- **Audio** Line-out
- **USB Ports** 6 x USB, UHCI, Rev. 2.0 compliant
2 x Front, 3 x Rear and 1 x Internal ports
- **Expansion** 3 x Domain I/O expansions (Only slot 1 supports PCIe resource)

Environment

- **Humidity** 95% @ 40°C (non-condensing)
- **Operating Temperature** IEC 60068-2-2 with 100% CPU/ I/O loading, 48 hrs
-20 ~ 70°C (optional for -40°C)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Shock Protection** HDD: 1.0G half sine, 11ms
- **Vibration Protection** IEC 60068-2-64 (Random 1 Oct./min, 1hr/axis.)
HDD 1Grms @ 5!500Hz

Ordering Information


- **UNO-4673A-A33E** Intel Atom 1.66 GHz, 2 GB RAM Automation Computer
- **UNO-4683-D34E** Core i7 2.0 GHz, 4 GB RAM Automation Computer

Accessories


- **UNOP-1000I-AE** Expansion card for standard PCI and Mini PCI
- **UNOP-1000J-AE** Expansion card for standard PCI-104 and Mini PCIe
- **UNOP-1514C-AE** 4-port Fiber Optic LAN card
- **UNOP-1618D-AE** 8-port RS-232/422/485 w/EFT protection
- **UNOP-1628D-AE** 8-port RS-232/422/485 w/Iso and EFT
- **UNOP-1624D-AE** 4-port RS-232/422/485 w/Iso and EFT, 1-port IRIG-B
- **PCLS-DIAGAW10** Advantech Remote Monitoring & Diagnosis Utility
- **UNOP-1901-AE** HDD Expansion kit for UNO-4673A, 4683

Dimensions

Unit: mm

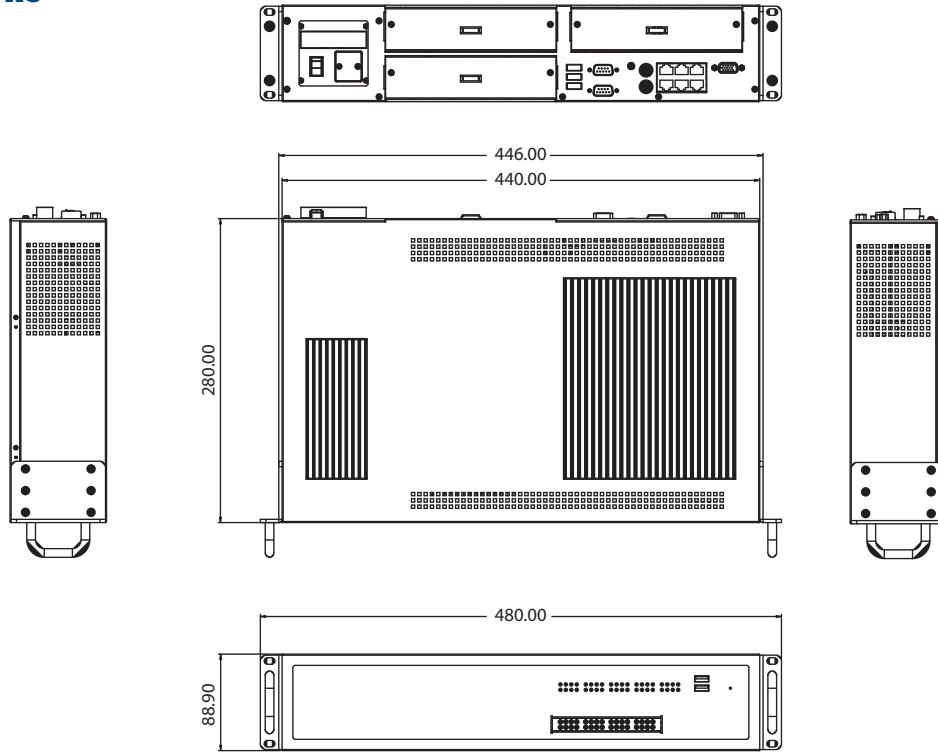

Front I/O

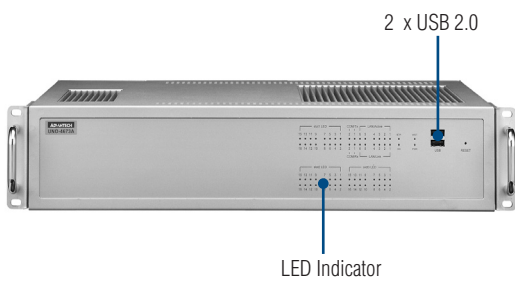

Rear I/O

