

pco.4000 cooled digital 14bit CCD camera system

- superior resolution (4008 × 2672 pixel)
- 14 bit dynamic range
- frame rate of 5 fps at full resolution
- image memory in camera (camRAM up to 4 GB)
- excellent low noise of $12e^-$ rms @ 8 MHz
- thermo-electrical cooling of -45° C vs. ambient
- standard interfaces (IEEE 1394, camera link)
- UV sensitive & color CCD image sensor available



pco.4000

This high resolution 14 bit cooled CCD camera system comprises advanced CCD and electronics technology. With the new approach to integrate the image memory (camRAM) into the camera itself, it enables unmatched fast image recording with 128 MB/s. The system features thermo-electrical cooling (down to -45°C vs. ambient), an excellent high resolution (4008 \times 2672 pixel) and low noise (down to 12e^{-} rms). It consists of a compact camera with an external intelligent power supply. The image data are transferred via customer selectable standard data interfaces to a computer (IEEE 1394 (“firewire”), camera link). The available exposure times range from 5 μs to 49 days. This digital CCD camera system is perfectly suited for low light and high resolution camera applications, like microscopy, aerial photography or quality control.

technical data

	unit	setpoint	pco.4000
resolution (hor \times ver) ¹	pixel	@ normal @ extended mode	4008 \times 2672 4072 \times 2720
pixel size (hor \times ver)	μm^2		9.0 \times 9.0
sensor format / diagonal	mm^2 / mm	@ extended mode	36.6 \times 24.5 / 44.0
peak quantum efficiency	%	@ 500 nm typical	50
full well capacity of CCD	e^{-}		60 000
image sensor			KAI-11000
maximum dynamic range	dB		74
dynamic range A/D ²	bit		14
readout noise	e^{-} rms	@ 8 / 32 MHz	12 / 22
imaging frequency, frame rate	fps	@ full frame	5.0
pixel scan rate	MHz		2 \times 8 / 2 \times 32
A/D conversion factor	e^{-} / count		3.3
spectral range	nm	normal UV sensitive	320..1000 200..1000
exposure time	s		5 μs ..49 days
anti-blooming factor		typical	> 300
smear	%		0.01
binning horizontal	pixel		1, 2
binning vertical	pixel		1, 2, 4, 8
dark current	e^{-} / pixel-s	@ 20° C typical @ -20° C typical	0.7 0.02
region of interest	pixel	hor & ver	1, 2, 3, 4...n

technical data

non linearity	%	full temperature range @ 8 MHz	< 2
uniformity darkness DSNU ³	e ⁻ rms	@ 90% center zone	< 20
uniformity brightness PRNU ⁴	%	typical	2
trigger, auxiliary signals		internal external	software TTL level
power consumption	W	typical maximum	25 50
power supply	VAC		90...260
mechanical dimensions camera (w x h x l)	mm ³		84 x 66 x 175
mechanical dimensions power supply (w x h x l)	mm ³		135 x 51 x 195
weight	kg		1.9
operating temperature range	°C		+5...+40
operating humidity range	%		10..90
storage temperature range	°C		-20...+70
optical input			Nikon f-mount
optical input window			fused silica
data interface			IEEE 1394, camera link
CE certified			yes
cooled CCD	°C	versus ambient temperature	Δ-45
cooling method			2 stage Peltier cooler with forced air cooling
interframing time (PIV mode)	ns		250

[1] horizontal versus vertical

[2] Analog-to-Digital-converter

[3] dark signal non-uniformity

[4] photo response non-uniformity

software

Camware software for camera control, image acquisition and archiving of images in various file formats, WindowsXP and later, 32 bit-dynamic link library (DLL) is available for user customisation and integration on PC platforms (software development kit - SDK), software is operational in either single mode or with built-in recorder functions, drivers for popular third party software packages are available (see website)


options

CCD image sensor in color & UV sensitive version
custom-made versions
camRAM available in: 512 MB, 1 GB, 2 GB & 4 GB

frame rate table [frames per second]


pixelclock used A/D converters	8 MHz 1 / 2	32 MHz 1 / 2
full frame	0.7 / 1.4	2.7 / 5.0
2 × 2 binning	1.4 / 2.7	5.2 / 9.2
2 × 8 binning	5.0 / 9.2	15.7 / 24.0
ROI 2048 × 2048 pixel	0.9 / 1.8	3.4 / 6.3
ROI 1600 × 1200 pixel	1.5 / 3.0	5.6 / 9.8
ROI 1280 × 1024 pixel	1.8 / 3.4	6.4 / 11.1
ROI 640 × 480 pixel	3.6 / 6.6	11.8 / 18.9

quantum efficiency

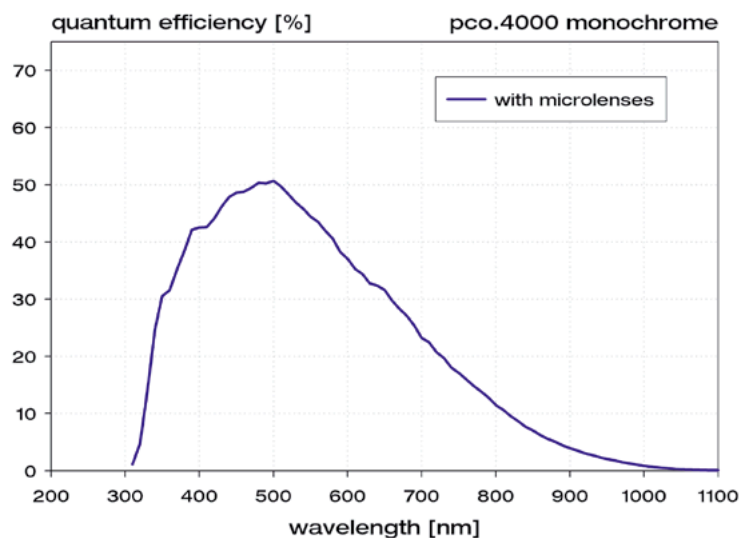

(KAI-11000 monochrome qe curve as measured by Kodak)

quantum efficiency

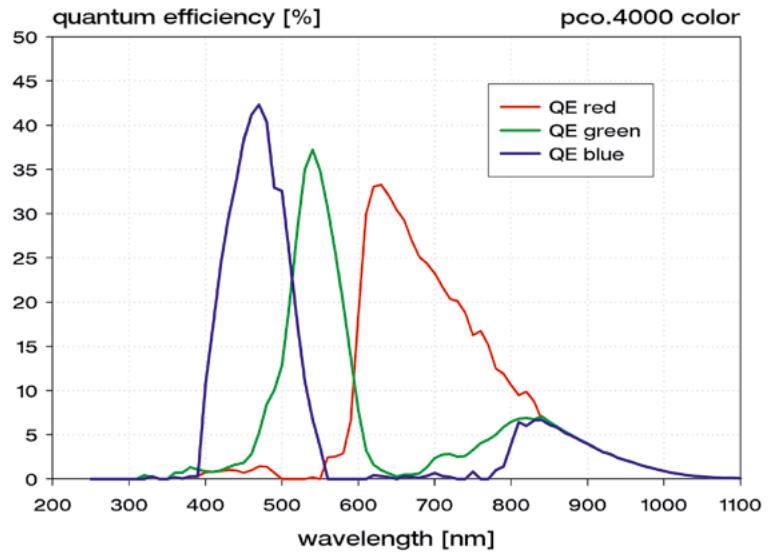

(KAI-11000 color qe curves as measured by Kodak)

areas of application

■ laser induced fluorescence ■ high resolution microscopy ■ luminescence microscopy ■ electron microscopy ■ fluorescence spectroscopy (up to NIR) ■ bioluminescence ■ chemoluminescence ■ low light level imaging ■ imaging of bio markers (e.g. green fluorescent protein, GFP) ■ time resolved spectroscopy ■ spray analysis ■ hydrodynamics ■ electrophoresis ■ absorption & luminescence spectroscopy ■ imaging of potential sensitive dyes (Neuroscience) ■ security ■ astronomy ■ combustion process analysis ■ gel imaging ■ fuel injection ■ scientific imaging ■ piv imaging ■ fluorescence imaging ■ semiconductor quality control ■ aerial photography ■ flow visualization ■ traffic control and surveillance

Full resolution image (4008 x 2672 pixel) of a pco.4000, recorded with a Nikon lens (focal length = 200 mm, aperture = 16). It corresponds to 8 images of a sensicam camera with SVGA resolution.



Sub-image (251 x 167 pixel) of image above, illustrating the huge amount of information comprised in one full resolution image of the pco.4000. Even the license plate of the car could be read.



contact

PCO AG
Donaupark 11
93309 Kelheim, Germany

fon +49 (0)9441 2005 50
fax +49 (0)9441 2005 20
info@pco.de
www.pco.de

The Cooke Corporation
6930 Metroplex Drive
Romulus, Michigan 48174
USA
tel 248 276 8820
fax 248 276 8825
info@cokecorp.com
www.cookecorp.com

pco.4000 product sheet 09/2005
subject to changes without prior notice ©PCO AG, Kelheim