

PERFORMANCE CHARACTERISTICS


Characteristics	Min.	Typ.	Max.	Units
Analog output low voltage	0.5			V
Analog output high voltage			5	
Logic low voltage			0.6	
Logic high voltage	$V_s - 0.7$			
Analog output current			10	mA
Output sink current (output low)			25	
Output source current (output high)			25	
Response time		250		ms

TANK/VESSEL REQUIREMENTS:

The material of the tank or vessel can be of metal or plastic. It must be single wall construction and shall have a location on the underside that is relatively flat and parallel to the surface of liquid. Any obstruction in the tank or vessel may effect the sensor output.

The sensor mounting flange shall be fixed to the bottom side of the vessel or tank using two # 10 screws.

OUTLINE DRAWING

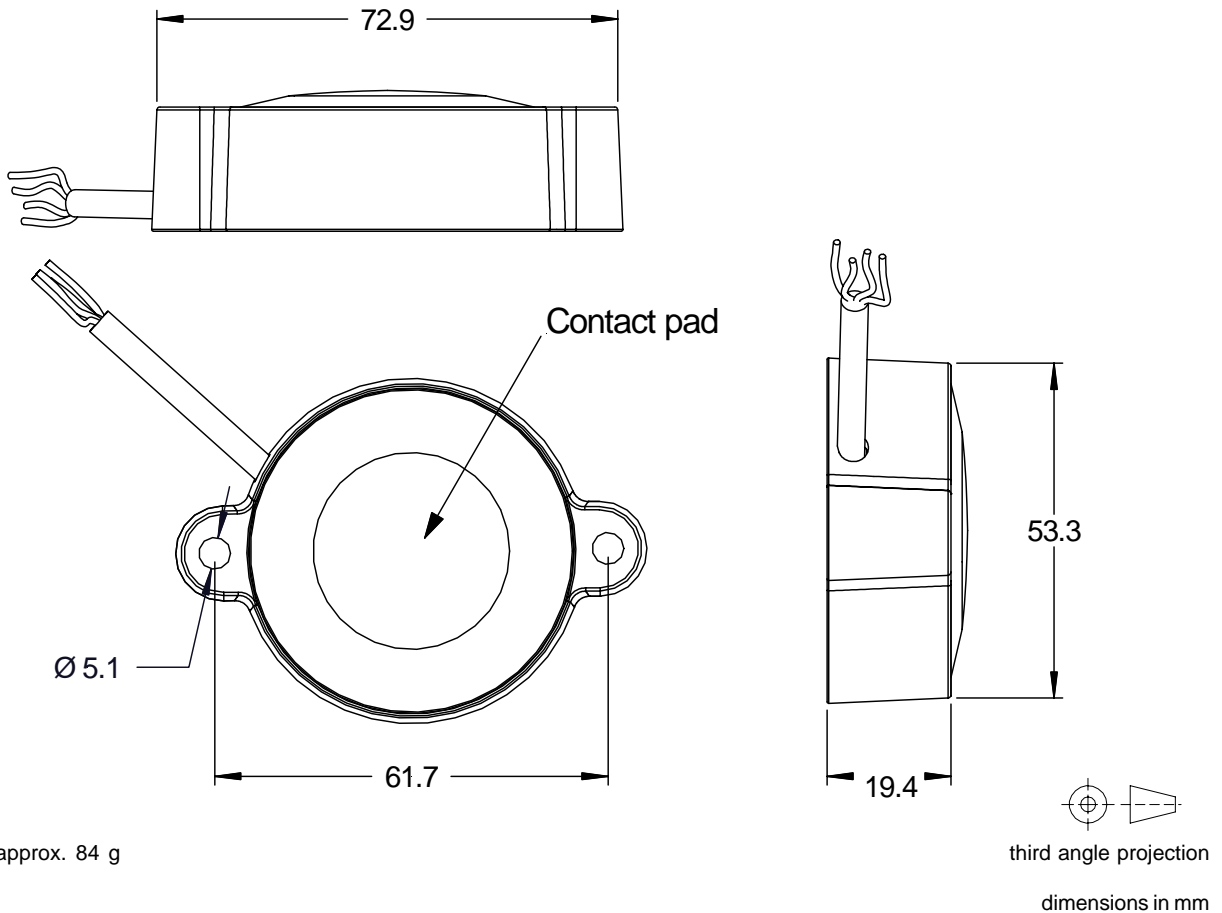

mass: approx. 84 g

ELECTRICAL CONNECTION

Pin	Color	Connection
1	Red	Supply voltage
2	Black	Power and signal return
3	Orange	Analog output
4	Green	Logic output (optional)

Note: Custom specific options are widely available.
 Please contact your nearest Sensortechinics sales office for further information.

Sensortechinics reserves the right to make changes to any products herein. Sensortechinics does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.