

## IC - Single Chip Solutions

Very small communication interfaces fitting into a standard DIL-32 chip socket

- ▶ Profibus
- ▶ DeviceNet
- ▶ EtherNet/IP
- ▶ Modbus-TCP

## Anybus-IC is a family of very small communication interfaces with the footprint of a DIL-32 chip socket. Anybus-IC contains all electronic components and software required for an industrial fieldbus or Ethernet interface.

**Anybus-IC is a family of complete single chip interfaces for industrial networks. It is optimized for field devices, where small size, low power consumption and multiple network connectivity is important. Anybus-IC is based on the new Anybus NP30 processor from HMS. Anybus-IC contains all electronic components and software necessary to implement a full featured industrial communication interface. Everything is integrated into a single board solution that fits perfectly into a standard DIL-32 chip socket consuming only 9 cm<sup>2</sup> (3.5 sq. in) in size.**

### Tiny, but powerful - when size restrictions are the main factor!

Anybus-IC is a small communication interface based on HMS' new NP30 processor. It provides a very small connectivity solution designed for integration into small sized devices with limited space for the communication interface. Anybus-IC can be used with various network connectors such as M12 or screw terminals, which makes it an elegant solution for devices that are used in harsh industrial environments. The Anybus-IC has a footprint of a standard DIL-32 chip socket.

Anybus-IC requires only one 5 Volt power supply and provides a full galvanically isolated network interface. A separate Anybus-IC version is available for each network. Standardization of the mechanical, electrical and software interfaces ensures that the different Anybus-IC's are interchangeable. The Anybus-IC contains all the digital and analog hardware as well as all necessary software to communicate with the selected network. Anybus-IC is a proven solution that has been tested and approved for fieldbus/Ethernet conformity.

#### Profibus, DeviceNet & Industrial Ethernet

Anybus-IC is available as Profibus-DP slave, DeviceNet adapter and a combined EtherNet/IP adapter/Modbus-TCP slave. The Ethernet version of Anybus-IC includes embedded

Internet features. The embedded dynamic web server offers a lot of free disk space to download any kind of application specific web pages. Web pages can be created to visualize information and control functions in a user friendly way by utilizing Java or SSI scripts. Anybus-IC provides a complete E-mail client on-board which can be configured to send out E-mail alerts on specific events. The FTP-based file system supports multi level access protection.



An example of the Anybus-IC DeviceNet in a valve block. Just simply add power and network connectors for instant DeviceNet connectivity.

### Communication with or without a micro controller

#### Flexible data exchange interfaces

Apart from the network interface, the module features two additional data exchange interfaces (SCI and SSC). These interfaces operate independently of each other and can be used simultaneously.

#### Serial Communication Interface (SCI)

Intelligent devices such as incremental encoders, sensors/actuators, operator terminals and motor control units normally have their own micro controller. Via the serial 2-wire TTL interface (SCI), the Anybus-IC connects to the micro controller of an intelligent automation device. This provides access to cyclic I/O data and

acyclic parameters of the network. The communication between the Anybus-IC and the micro controller of the automation device is based on the proven Modbus-RTU protocol. Via the SCI interface, the Anybus-IC supports up to 128 byte Input and 128 byte Output data.

#### Synchronous Serial Channel (SSC)

For non-intelligent devices, like valve terminals and modular I/O devices, Anybus-IC features a clocked shift register interface (SSC) that provides direct access to cyclic I/O network data without the need for an additional microprocessor. With additional A/D or D/A converts, even analog Input or Output signals can be easily integrated into fieldbus or industrial Ethernet networks.

#### WHY USE ANYBUS-IC MODULES?


- Connectivity to several networks in one development
- Very small single board solution, ideal where size restriction matters
- Same hardware and software interface from the view of the host device
- Very low power consumption
- Capability to use specific network connectors for IP65 protected devices
- Up to 70% savings in development costs compared with own implementation
- Continuous technology maintenance by HMS
- Short time-to-market, typically only 1-3 months for several networks



**Available for:**

Profibus  
DeviceNet  
EtherNet/IP  
Modbus-TCP

Anybus NP30 processor

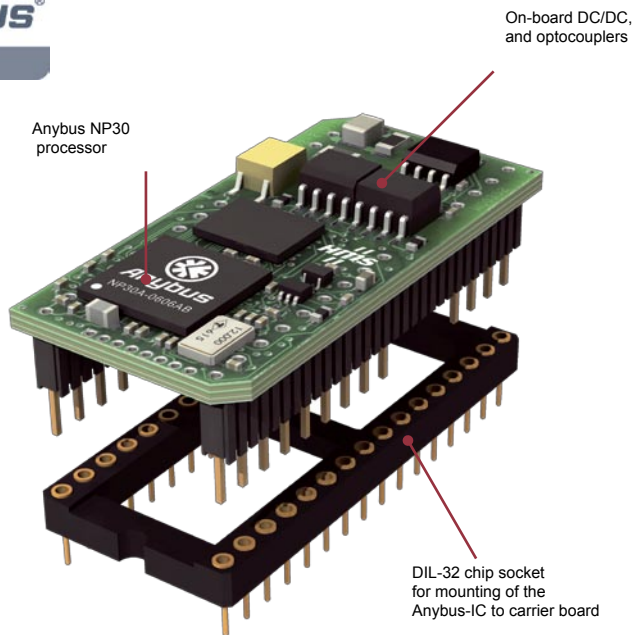


**KEY FEATURES**

- Very small size - ideal for small to medium-sized industrial applications
- Works as a stand-alone controller or together with another micro controller
- Contains all analog and digital components for full network connectivity
- DC/DC converter and optocouplers on-board
- Powered by the new Anybus NP30 processor
- Max data on SCI serial interface: 128 byte Input & 128 byte Output
- SSC Shift register interface for data exchange of max 16 byte Input and 16 byte Output data
- Configuration and monitoring via a PC configuration port
- DIL-32 chip socket
- Very low power consumption
- Flash upgradable


**Interface options - Anybus-IC**

**Without micro-controller**

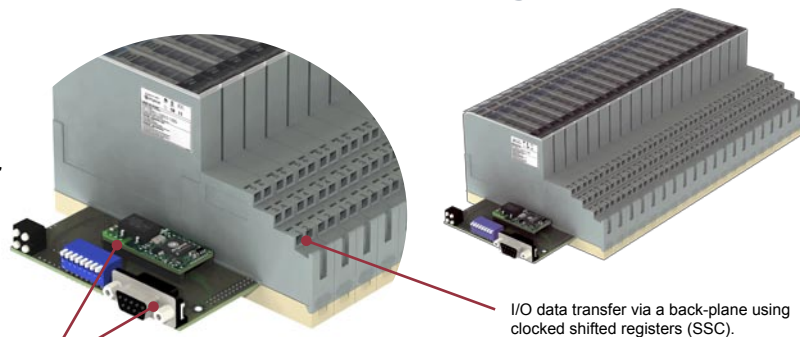

Just add a power supply and fieldbus connector for instant connection to Profibus, DeviceNet or industrial Ethernet

**With a micro controller**

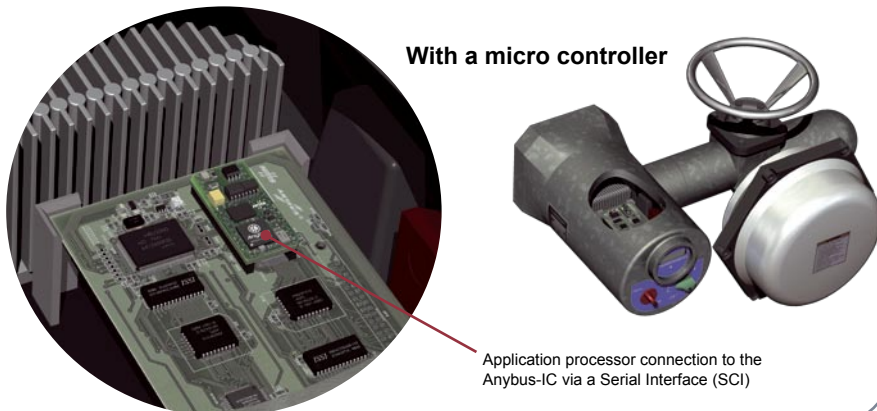





Application processor connection to the Anybus-IC via a Serial Interface (SCI)

**TECHNICAL SPECIFICATION**

- Size: 42 x 21 x 15 mm (L x W x H)  
1.65" x 0.83" x 0.59" (L x W x H)
- Power supply: +5 Volt
- Operating temperature  
-10 °C to + 70 °C  
14 °F to + 158 °F
- Humidity: 5 to 95% non-condensing
- Emission: EN 50081-2: 1993  
Immunity: EN 61000-6-2: 1999  
UL and cUL Compliance: Pending  
CE-mark: CE-marked (all versions)
- Application connector: DIL-32
- Tested and verified for fieldbus and network conformance
- RoHS compliance

# Network specific supported features - Anybus-IC

 <p><b>Profibus-DP AB6000</b></p> <ul style="list-style-type: none"> <li>• Complete Profibus-DP slave</li> <li>• Max. data size via serial interface (SCI): 128 byte Input and 128 byte Output</li> <li>• Max. data size via Synchronous Serial I/O Channel (SSC): 16 byte Input and 16 byte Output</li> <li>• Automatic baud rate detection (9600 bit/s - 12 Mbit/s)</li> <li>• RS-485 galvanic isolated Profibus interface with on-board DC/DC converter</li> <li>• Up to 237 byte of user parameter data</li> <li>• Up to 200 byte of extended diagnostic data</li> </ul>	 <p><b>DeviceNet AB6001</b></p> <ul style="list-style-type: none"> <li>• Complete DeviceNet adapter</li> <li>• Max. data size via serial interface (SCI): 128 byte Input and 128 byte Output</li> <li>• Max. data size via Synchronous Serial I/O Channel (SSC): 16 byte Input and 16 byte Output</li> <li>• DeviceNet baud rate: 125-500 kbit/s</li> <li>• Galvanic isolated DeviceNet interface</li> <li>• I/O slave messaging: bit strobe, polling, cyclic &amp; change of state (COS) and explicit messaging</li> <li>• Acyclic data and parameter data mapping</li> </ul>	 <p><b>EtherNet/IP / Modbus/TCP AB6003</b></p> <ul style="list-style-type: none"> <li>• Complete EtherNet/IP adapter</li> <li>• Support also for Modbus-TCP V1.0 server</li> <li>• Ethernet baud rate 10/100 Mbit/s</li> <li>• Supports UDP/IP and TCP/IP via a transparent socket interface</li> <li>• Integrated FTP server provides easy file management using standard FTP clients</li> <li>• Dynamic web server with SSI script capability and support for Java applets and scripts</li> <li>• E-mail client capability with SSI script support</li> </ul>
<p><b>Evaluation Board ABIC-EVB</b></p>  <p>With the Anybus-IC Evaluation Board it is possible to initialize the Anybus-IC and monitor the data exchange directly from a terminal program on a PC. The EVB is complete with all hardware to be able to set address, baud rate and monitor the fieldbus status LEDs. It is also possible to read out (2 byte) and set data (2 byte) to the fieldbus master directly on the board.</p>	<p>The SCI channel can be connected via the RS-232 interface, for direct access from a PC. Serial cabling is included in the kit for the SCI channel and the monitoring channel. Also included in the Anybus-IC EVB: manuals for the modules and an easy startup guide, manual for the Evaluation Board, example software and schematics of a carrier board to the Anybus-IC.</p> <p><b>Key Features:</b></p> <ul style="list-style-type: none"> <li>• Serial port with RS-232 line drivers for SCI communication</li> <li>• Serial port with RS-232 line drivers for the monitor interface</li> <li>• Switches and LEDs for easy monitoring and setting of fieldbus data</li> </ul>	<p><b>Under development</b></p> <p><b>Profinet I/O</b></p> <ul style="list-style-type: none"> <li>• Complete Profinet I/O device functionality</li> <li>• 100 Mbit/s full duplex transmission</li> <li>• Available 2008</li> </ul> <p><b>CANopen</b></p> <ul style="list-style-type: none"> <li>• Complete CANopen slave functionality</li> <li>• Supports SDO and PDO data</li> <li>• Available 2008</li> </ul>
<p>Customized versions for specific requirements possible - Contact your nearest HMS office</p>		



## About HMS

HMS Industrial Networks is the leading independent supplier of network technology for automation devices. HMS develops and manufactures solutions for interfacing automation devices to industrial networks.

Development and manufacturing takes place at the head office in Halmstad, Sweden. Local sales and development support for device manufacturers is provided by the branch offices in Chicago, Beijing, Karlsruhe, Milan, Mulhouse and Tokyo and by a global distribution network spanning 30 countries. HMS employs 138 persons of which 35 in R&D and reported sales of \$30 million in 2006. HMS is ranked in the top 500 fastest growing companies in Europe.

For more information please visit:  
[www.anybus.com](http://www.anybus.com)



### Sweden (HQ)

Tel: +46 (0) 35 17 29 00  
 Email: [sales@hms-networks.com](mailto:sales@hms-networks.com)  
[www.anybus.com](http://www.anybus.com)



### Germany

Tel: +49 (0) 721 96472-0  
 Email: [info@hms-networks.de](mailto:info@hms-networks.de)  
[www.anybus.de](http://www.anybus.de)



### Italy

Tel: +39 (0)39 59662 27  
 Email: [it-sales@hms-networks.com](mailto:it-sales@hms-networks.com)  
 Web: [www.anybus.it](http://www.anybus.it)



### France

Tel: +33 (0)3 89 32 76 76  
 Email: [fr-sales@hms-networks.com](mailto:fr-sales@hms-networks.com)  
[www.anybus.fr](http://www.anybus.fr)



### USA

Tel: +1 312 829 0601  
 Email: [us-sales@hms-networks.com](mailto:us-sales@hms-networks.com)  
[www.anybus.com](http://www.anybus.com)



### Japan

Tel: +81 (0) 45 478 5340  
 Email: [jp-sales@hms-networks.com](mailto:jp-sales@hms-networks.com)  
[www.anybus.jp](http://www.anybus.jp)



### China

Tel: +86 (0) 10 8532 3183  
 Email: [cn-sales@hms-networks.com](mailto:cn-sales@hms-networks.com)  
[www.anybus.cn](http://www.anybus.cn)